

IL4 系列指示灯

特点

- 多种可选电压
- LED节能灯
- 反向电压保护
- UL 列名编号 E216958
- 防护等级可达 IP67
- 可选快接端子用于简易安装
- 适用面板厚度 0.030" 到 0.093"

规格

安装孔径	Ø0.500" (Ø12.7mm)
工作电流	3E(3V AC/DC): 9mA 5E(5V AC/DC): 10mA 6E(6V AC/DC): 18mA 12E(12V AC/DC): 17mA 24E(24V AC/DC): 12mA 120E(120V AC/DC): 5mA 240E(240V AC/DC): 5mA
工作温度	-40~+85°C (-40~+185°F)
寿命	100,000 小时
防护等级	IP67 对于 -V -W 型号
面板厚度	0.030" 到 0.093"

选型指南:

IL 4	E	-	120	E	-	G	-	U6	-	W*
安装孔径	选项		工作电压			颜色		端子形式		密封
4: 1/2"	E: 凸头 F: 平头		3: 3V AC/DC 5: 5-7V AC/DC 6: 5-7V AC/DC 12: 12-14V AC/DC 24: 19-28V AC/DC 120: 100-140V AC/DC 240: 200-280V AC/DC			G: 绿色 R: 红色 A: 橙色 Y: 黄色 B: 蓝色 W: 白色		Q: 快接端子 0.187" Q2: 快接端子 0.25" U6: 6英寸导线 M15: 15厘米导线		空: 无密封 V: 面板密封 W: 全密封




*可根据客户需求定制标识


尺寸图:

IL4E 凸头式:


密封款 -Q 快接端子




无密封款 -Q 快接端子



密封款 -Q2 快接端子




密封款 -U6 6英寸导线

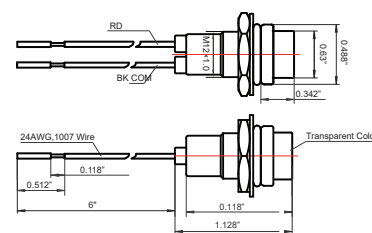

IL4F 平头式:

密封款 -Q 快接端子 0.187" 密封款 -Q2 快接端子 0.25"



IL4F-M16

