

## 限速器限位开关 (手动复位)

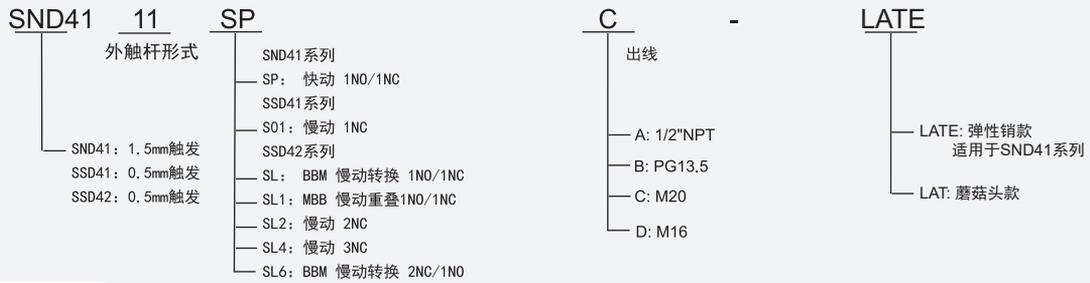
### 特点

- 高强度玻璃纤维增强尼龙材料
- 符合 EN 60947-5-1, IEC 60947-5-1, UL508, ASME A17.1/5, EN81-1, EN81-2 标准
- 高灵敏性及轻触发力
- 电气隔离式触点
- NC触点具有强制离开机构
- 符合EN 50047标准


### 规格

|         |  |
|---------|--|
| 操作速度    | 0.05mm-2m/sec                                      |
| 额定电流/电压 | 10A/600V AC (EN60947-5-1)<br>AC15 A600 / DC13 Q300 |
| 寿命      | 机械 120ops/min ; 电气 30 ops/min                      |
| 环境温度    | -25~+80°C (-13~176°F) 不结冰                          |
| 动作力     | 6N(+/- 2N)   |
| 触发行程    | < 0.5mm  |
| 触点间距    | 2 × 2 mm   |
| 保护等级    | IP67   |

### 选型指南











安装尺寸 单位: mm

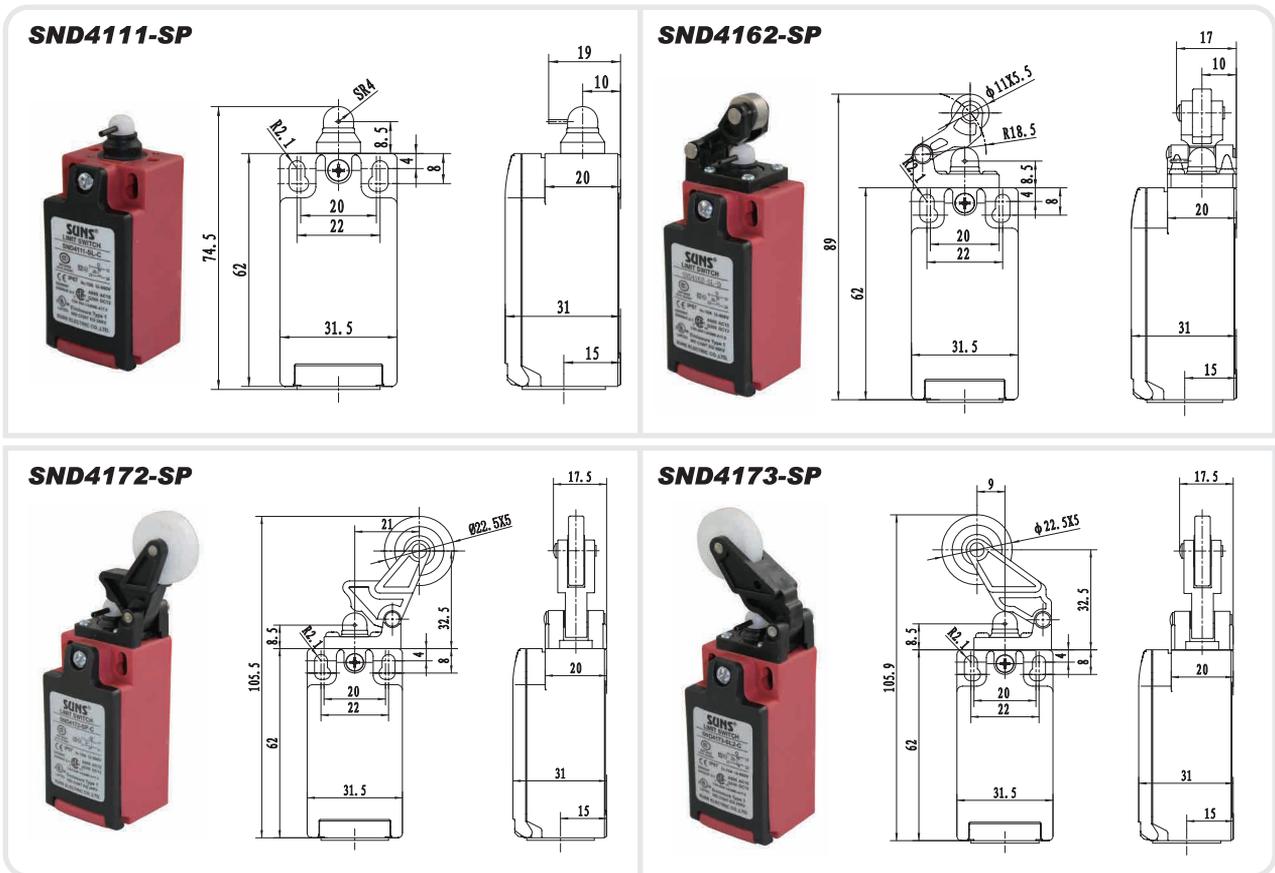

## 限速器限位开关 (手动复位)
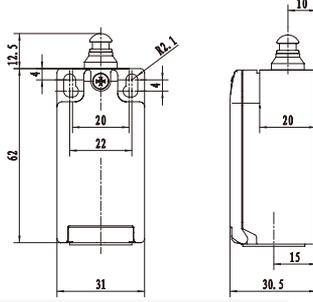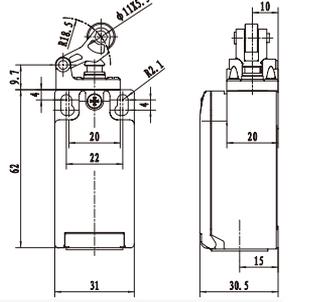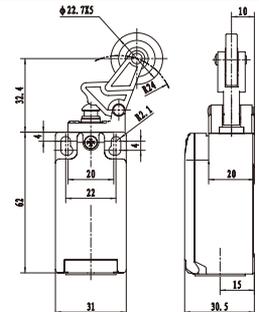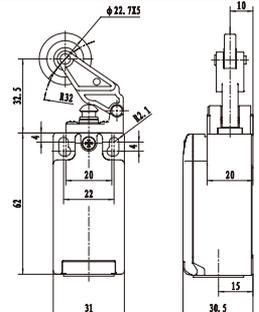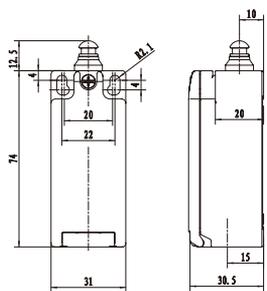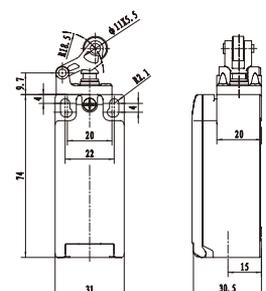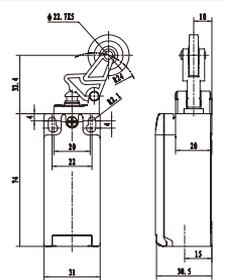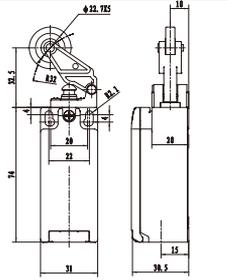
### SSD4 系列

|   |   |
|---|---|
|   <p>型号<br/>SSD4111-S01</p> <p>强制开离</p> <p>慢动</p> <p>1NC</p>  |   <p>型号<br/>SSD4162-S01</p> <p>强制开离</p> <p>慢动</p> <p>1NC</p>  |
|   <p>型号<br/>SSD4172-S01</p> <p>强制开离</p> <p>慢动</p> <p>1NC</p>  |   <p>型号<br/>SSD4173-S01</p> <p>强制开离</p> <p>慢动</p> <p>1NC</p>  |
|   <p>型号<br/>SSD4211-SL</p> <p>强制开离</p> <p>慢动</p> <p>1NC/1NO BBM</p> <p>SSD4211-SL2</p> <p>慢动</p> <p>2NC</p> <p>SSD4211-SL6</p> <p>慢动</p> <p>2NC/1NO</p> |   <p>型号<br/>SSD4262-SL</p> <p>强制开离</p> <p>慢动</p> <p>1NC/1NO BBM</p> <p>SSD4262-SL2</p> <p>慢动</p> <p>2NC</p> <p>SSD4262-SL3</p> <p>慢动</p> <p>2NC/1NO</p> |
|   <p>型号<br/>SSD4272-SL</p> <p>强制开离</p> <p>慢动</p> <p>1NC/1NO BBM</p> <p>SSD4272-SL2</p> <p>慢动</p> <p>2NC</p> <p>SSD4272-SL6</p> <p>慢动</p> <p>2NC/1NO</p> |   <p>型号<br/>SSD4273-SL</p> <p>强制开离</p> <p>慢动</p> <p>1NC/1NO BBM</p> <p>SSD4273-SL2</p> <p>慢动</p> <p>2NC</p> <p>SSD4273-SL6</p> <p>慢动</p> <p>2NC/1NO</p> |