

PM16 系列金属密封按钮开关

产品特性

- 专为医学和海上应用设计的高强度结构
- 抗振耐冲击
- 令人愉悦的触觉反馈
- 可选焊接或螺丝端子
- 符合军规Mil-PRF-8805
- 防护等级IP68

产品规格


外壳材料	阳极氧化铝
按钮材料	热塑性尼龙材料
接点电阻	<50mΩ (初值)
耐压值	1000V 持续一分钟
动作力	~4 lbs (18N) 或 2.5 lbs (11N)
操作温度	-55~+85°C (-67 ~185°F)
机械寿命	一百万 (次)
电气寿命 (@28VDC or 115VAC)	电阻负载 10A 100,000 (次) 电阻负载 15A 25,000 (次) 电感负载 5A 100,000 (次) 电灯负载 3A 100,000 (次) 电阻负载 10A 100,000 (次) @ 64VDC
防护等级	IP68

选型指南:

PM16 - D2 - M 1 1 1 - G	按钮样式	选项	接点形式	触点	表面颜色	按钮颜色	橡胶帽颜色 (可选)
	D1: 圆头 D2: 凸圆头 B1: 螺纹式 B2: 螺纹式 B3: 螺纹式 P1: 冲压式 P2: 冲压式 F1: 前置螺纹 F2: 前置螺纹	空: 瞬动 M: 保持式 P: 推拉式 S: 背板短款	1: 焊接/标准 2: 螺丝/标准 3: 焊接/短 4: 螺丝/短 5: .250" 快接	1: 1NO 2: 1NC 3: 1NO/1NC	1: 银色 2: 黑色	B: 黑 G: 绿 R: 红 Y: 黄 O: 橙 U: 蓝 W: 白 P: 紫 A: 灰	B: 黑 G: 绿 R: 红 Y: 黄 O: 橙 U: 蓝 W: 白 P: 紫 A: 灰

产品图片及尺寸图:

PM16-D2-511G

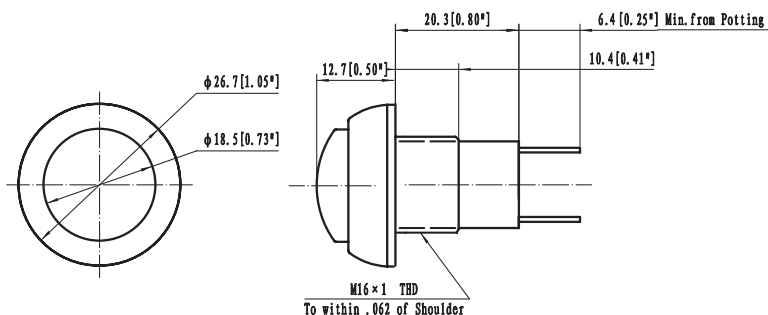

PM16-D2-511G-B



PM16-D2-511G-U




PM16-D2-511G-Y




PM16 系列金属密封按钮开关


PM16-B2-111-R

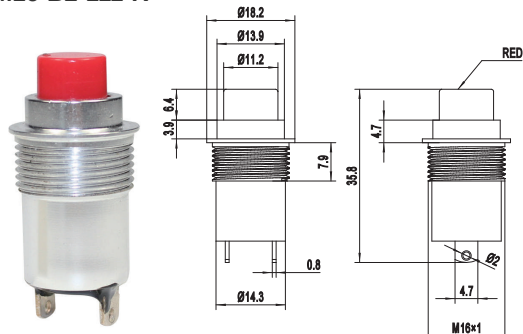


PM16-D1-M132-G

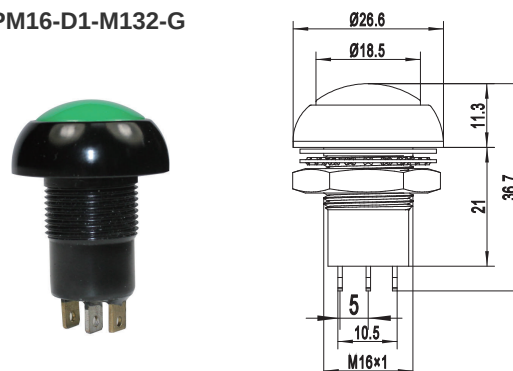


PM16-P1-M132-Y

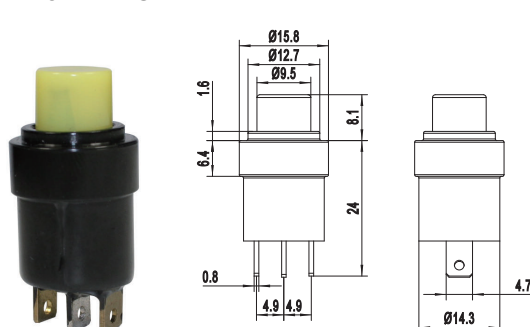

PM16-B2-112-Y

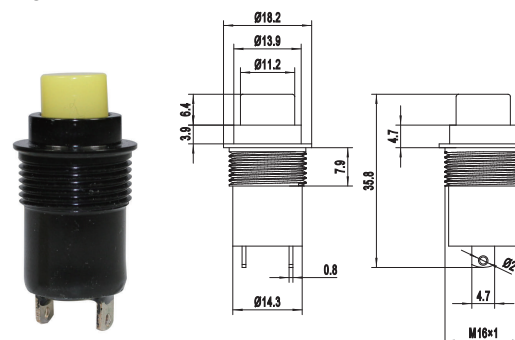

PM16-A1-111-B

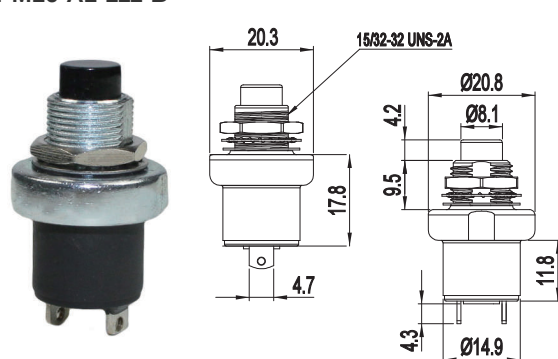

PM16-F4-111-GY

