

DSW Series Seat Switches

Features

- Standard .032 x .250 blade terminals
- Self-clean contacts for long service life
- IP65 water-proof version also available

Specifications


Rated Current/Voltage	3A / 14V	
Pre-Travel	1.0-3.8mm (0.04-0.15 inch)	
Service Life	Resistive load	75,000 (operations)
	Inductive load	10,000 (operations)
Operating Temperature	-35~+66°C (-30 ~150°F)	
Degree of Protection	IP53 (or IP65)	
Salt Fog	ASTM B117, 96 Hours	
Chemical Resistance	ASTM Ref C Fuel, Diesel Fuel, Oil, Antifreeze, Paint, Latex, Gasoline, Gas with 10%ethanol, WD-40, Battery Acid Ammoniated Glass Cleaner, Kerosene, Go Jo, Fertilizer	

Dimensions: Inch[mm]

DSW-110 (NO)
DSW-110-W (NO, IP65)
DSW-101 (NC)
DSW-101-W (NC, IP65)
DSW-111 (1NO/1NC)
DSW-102 (2NC)



Unit: inch(mm)

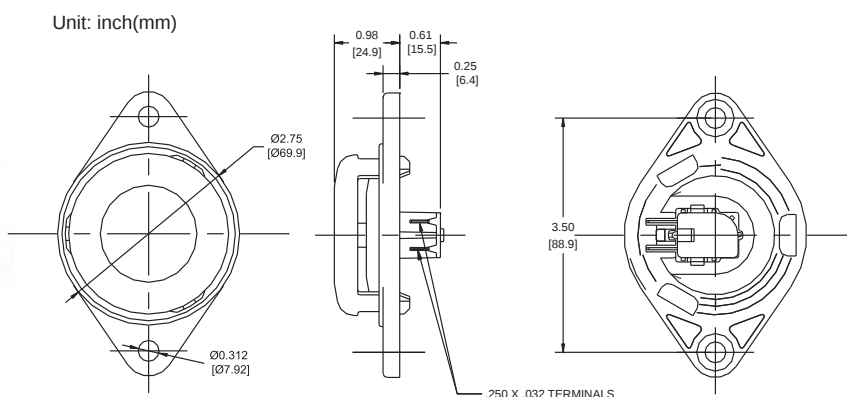

DSW-210 (NO)
DSW-210-W (NO, IP65)
DSW-201 (NC)
DSW-201-W (NC, IP65)
DSW-211 (1NO/1NC)
DSW-202 (2NC)



Unit: inch(mm)

